




SLIDE VALVE (PSV)

VALVOLE A GHIGLIOTTINA

Valvula De Guillotina

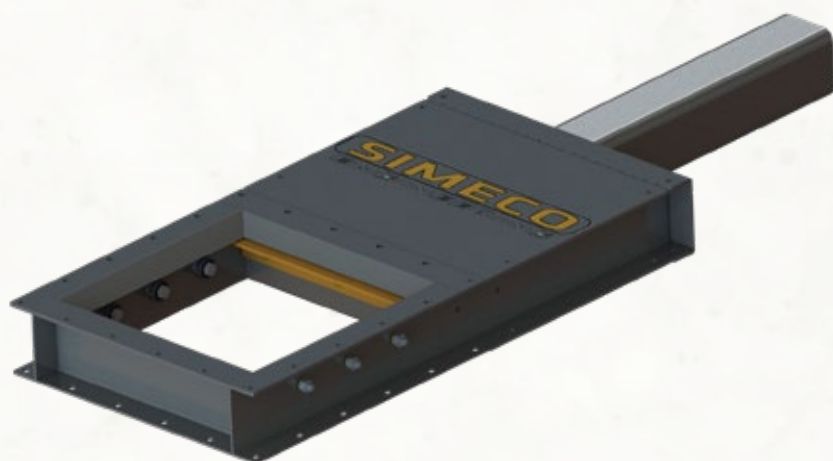

WORKING PRINCIPLE

DESCRIZIONE E FUNZIONE D'USO

DESCRIPCIÓN Y FUNCIÓN DE USO

- PSV Slide Valve are used to control the flow of a bulk material like sludge, powder or granular material.
- They can be installed at the inlet of a conveyor or feeder, or at the discharge.
- They can be controlled by a manual actuator (in the simpler feature) or by a pneumatic or electrical actuator depending on the application.
- Le valvole a ghigliottina PSV sono usate per controllare il flusso di materiali solidi quali fanghi, polveri o materiali granulati.
- Possono essere installate all'inizio del convogliatore o allo scarico.
- Il controllo della ghigliottina può essere manuale, pneumatico oppure elettrico a seconda dell'applicazione.
- Las válvulas Modelo PSV se utilizan para controlar el flujo de un material a granel como lodo, polvo o material granular.
- Se pueden instalar en la entrada o en la descarga de un transportador.
- Pueden ser controlados por un actuador manual o por un actuador neumático o eléctrico dependiendo de la aplicación.

APPLICATION FIELDS

- Bulk Material Handling Plant

CAMPI APPLICATIVI

- Impianti di movimentazione materiali solidi, polverosi e/o granulari

CAMPOS DE APLICACIÓN

- Sistemas de manipulación de materiales sólidos, polvorientos y / o granulares



MANUFACTURING FEATURES

Structure

Galvanized Mild Steel
Stainless Steel AISI 304
Stainless Steel AISI 316

CARATTERISTICHE COSTRUTTIVE

Corpo

Acciaio al carbonio
Acciaio Inox 304
Acciaio Inox 316

CARACTERÍSTICAS CONSTRUCTIVAS

Estructura

Acero dulce galvanizado
Acero inoxidable AISI 304
Acero inoxidable AISI 316

SLIDE VALVE

PSV	CONVEYOR	A	B	C	D
150	DN100	125	460	260	115
200	DN150	185	560	310	115
250	DN200	225	655	360	115
300	DN250	275	760	430	115
350	DN300	325	905	480	128
400	DN350	375	1005	530	128
450	DN400	425	1180	582	128

